

## Technical Data Sheet E Series

### Basic Info

KSF E 89x1000-E60	KSF E 89x800-E60	KSF E 89x550-E60
<b>Nominal length (mm)</b>		
1000	800	550
<b>Tube diameter (mm)</b>		
88,90	88,90	88,90
<b>Weight (kg)</b>		
5,70	4,70	3,30
<b>Item number</b>		
24100	24080	24055




KSF E 89x800-E60

### Construction

- Coating: Hot-dip galvanized according to DIN EN ISO 1461
- Continuous welded helix
- Patented conical body forged from a single piece of tubing

### Applications

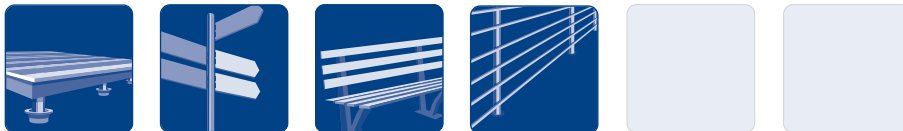

### Accessories



**Cover Plate 2 mm-E60**  
Item No. 24808



**Clamp Ring-E60**  
Item No. 24802



**Excenter-E60**  
Item No. 24801



**Fair Level-E60**  
Item No. 24803



**Excenter Set-E60**  
Item No. 24817



**Fixing Screw-E60**  
Item No. 21808



Subject to technical change!

**Krinner Schraubfundamente GmbH** | Passauer Straße 55 | D-94342 Straßkirchen  
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io

sustainable · durable · revolutionary

## Technical Data

	KSF E 89x1000-E60	KSF E 89x800-E60	KSF E 89x550-E60
<b>a</b>	<b>Length (mm) (<math>\pm 25</math> mm)</b>		
	1000	800	550
<b>b</b>	<b>Outer diameter (mm)</b>		
	88,90	88,90	88,90
<b>c</b>	<b>Inner diameter (mm)</b>		
	81,70	81,70	81,70
<b>d</b>	<b>Diameter setting* (mm)</b>		
	60	60	60
<b>e</b>	<b>Depth setting (mm) (<math>\pm 25</math> mm)</b>		
	270	270	270
<b>f</b>	<b>Alignment range</b>		
	3° (incl. Excenter)	3° (incl. Excenter)	3° (incl. Excenter)
<b>g</b>	<b>Thread</b>		
	3 x M8	3 x M8	3 x M8
<b>h</b>	<b>Pitch circle diameter (mm)</b>		
	118	118	118
<b>i</b>	<b>Flange outer diameter (mm)</b>		
	136	136	136
<b>j</b>	<b>Flange thickness (mm)</b>		
	3	3	3

\*Diameter setting (d) results in depth setting (e) and alignment range (f)

