

Technical Data Sheet F Series


Basic Info

KSF F76x3,6x1600-R HDG	KSF F76x2,6x1300-R HDG	KSF F76x2,6x1000-R HDG	KSF F76x2,6x800-R HDG
Nominal length (mm)			
1600	1300	1000	800
Tube diameter (mm)			
76,10	76,10	76,10	76,10
Weight (kg)			
11,00	7,00	6,00	4,50
Item number			
A0393	A0389	A0388	A0390

Construction

- Flange: Sheet metal S355
- Continuous welded helix
- Coating: Hot-dip galvanized according to DIN EN ISO 1461

Applications

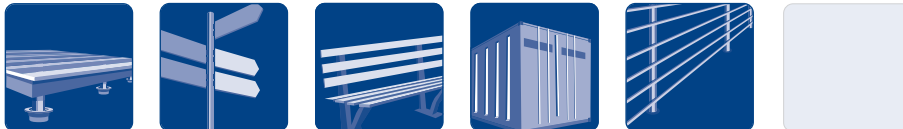

Accessories



Post support Easy Connector System-R
Item No. A0582



Post support Flat-R
Item No. A0583



Post support M24-R
Item No. A0584



Post support Side Flaps-R
Item No. A0586



Post support Vario PS 150-R
Item No. A0585



**KSF F76x2,6x1300-R
HDG**





sustainable · durable · revolutionary

Subject to technical changes!


Krinner Schraubfundamente GmbH | Passauer Strasse 55 | D-94342 Strasskirchen

Technical Data


	KSF F76x3,6x1600-R HDG	KSF F76x2,6x1300-R HDG	KSF F76x2,6x1000-R HDG	KSF F76x2,6x800-R HDG
a	Length (mm) (±25 mm)			
	1565	1265	1065	815
b	Shaft outer diameter (mm)			
	76,10	76,10	76,10	76,10
c	Inner diameter (mm)			
	68,00	68,00	68,00	68,00
d	Hole diameter (mm)			
	6 x Ø 11	6 x Ø 11	6 x Ø 11	6 x Ø 11
e	Pitch circle diameter (mm)			
	116	116	116	116
f	Flange length (mm)			
	189	189	189	189
g	Flange thickness (mm)			
	5	5	5	5
h	Flange width (mm)			
	140	140	140	140
i	Oblong hole grid size (mm)			
	100	100	100	100
j	Oblong hole length (mm)			
	49	49	49	49
k	Oblong hole diameter (mm)			
	11	11	11	11

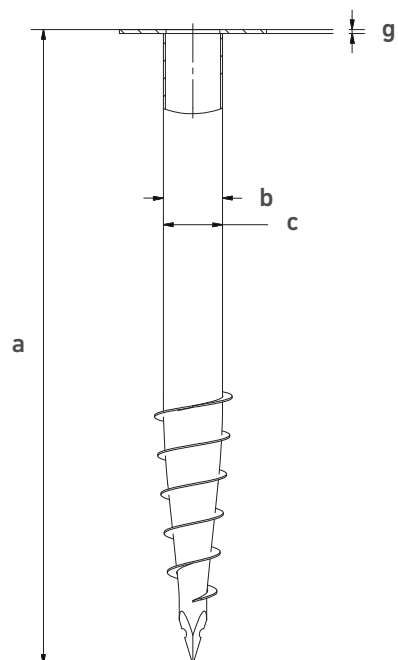


Post Anchor:




Flat R




M24-R



Easy connector system-R



Side Tabs R



Vario PS 150-R