

Technical Datasheet G Series

Basic Info

KSFG89x1300-4xM12 KSFG89x1000-4xM12 KSFG89x800-4xM12

Nominal length (mm)

1300 1000 800

Tube diameter (mm)

88,90 88,90 88,90

Weight (kg)

7,30 6,10 4,50


Item number

24207 24206 24205

Construction

- Nut: DIN EN ISO 4032 - 8
- Continuous welded helix
- Coating: Hot dip galvanized according to DIN EN ISO 1461

Applications

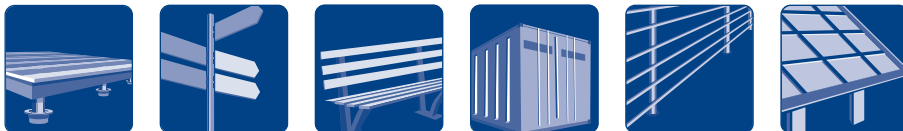

Accessories



Special Granulate
1500g
Item No. 21824



Special Granulate
500g
Item No. 21823



Screwing Bar long
2400g
Item No. 24805



KSFG 89x
1300-4xM12



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io

sustainable · durable · revolutionary

Technical Data

	KSFG89x1300-4xM12	KSFG89x1000-4xM12	KSFG89x800-4xM12
a	Length (mm) (± 25 mm)		
	1270	1070	820
b	Shaft outer diameter (mm)		
	88,90	88,90	88,90
c	Inner diameter (mm)		
	83,70	83,70	83,70
d	Diameter setting (mm)		
	76 40x60 60 48	76 40x60 60 48	76 40x60 60 48
e	Depth setting (mm) (± 25 mm)		
	970 1020 1055 1090	780 830 855 900	520 570 600 640
f	Thread		
	4 x M12	4 x M12	4 x M12

