

## Technical Data Sheet G Serie

### Basic Info

KSFG114x1300-4xM16 KSFG114x1000-4xM16

Nominal length (mm)

1300 1000

Tube diameter (mm)

114,30 114,30

Weight (kg)

10,00 8,00


Item number

24209 24208

### Construction

- Nut: DIN EN ISO 4032 - 8
- Continuous welded helix
- Coating: Hot-dip galvanized according to DIN EN ISO 1461

### Applications

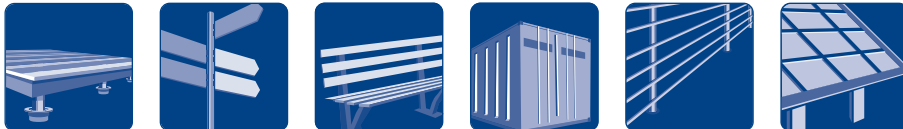

### Accessories



**Special Granulate**  
1500 g  
Item No. 21824



**Special Granulate**  
500 g  
Item No. 21823



**Screwing Bar long**  
2400 g  
Item No. 24805



KSFG 114x  
1300-4xM16



Subject to technical change!

**Krinner Schraubfundamente GmbH** | Passauer Straße 55 | D-94342 Straßkirchen  
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io

sustainable · durable · revolutionary

## Technical Data

| KSFG114x1300-4xM16 KSFG114x1000-4xM16 |                                   |                       |
|---------------------------------------|-----------------------------------|-----------------------|
| a                                     | Length (mm) ( $\pm 25$ mm)        |                       |
|                                       | 1255                              | 984                   |
| b                                     | Shaft outer diameter (mm)         |                       |
|                                       | 114,30                            | 114,30                |
| c                                     | Inner diameter (mm)               |                       |
|                                       | 107,10                            | 107,10                |
| d                                     | Diameter setting (mm)             |                       |
|                                       | 100   90   80   76                | 100   90   80   76    |
| e                                     | Depth setting (mm) ( $\pm 25$ mm) |                       |
|                                       | 490   540   570   590             | 350   400   440   460 |
| f                                     | Thread                            |                       |
|                                       | 4 x M16                           | 4 x M16               |

