

Technical Datasheet G Series


Basic Info

KSF G 89x2,6x1300 4xM16 HDG	KSF G 89x2,6x1000 4xM16 HDG	KSF G 89x2,6x800 4xM16 HDG
Nominal length (mm)		
1300	1000	800
Tube diameter (mm)		
88,90	88,90	88,90
Weight (kg)		
7,30	6,10	4,50
Item number		
A0413	A0412	A0414

Construction

- Nut: DIN EN ISO 4032 - 8
- Continuous welded helix
- Coating: Hot dip galvanized according to DIN EN ISO 1461

Applications

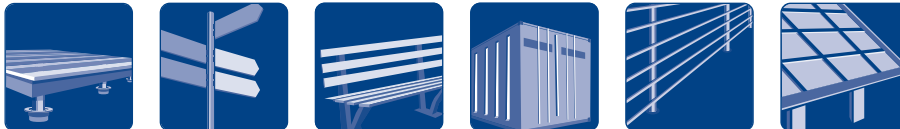

Accessories



Screw-in bar long
Item No. A0134



KSF G
89x2,6x1300
4xM16 HDG



sustainable · durable · revolutionary

Technical Data

	KSF G 89x2,6x1300 4xM16 HDG	KSF G 89x2,6x1000 4xM16 HDG	KSF G 89x2,6x800 4xM16 HDG
a	Length (mm) (± 25 mm)		
	1270	1070	820
b	Shaft outer diameter (mm)		
	88,90	88,90	88,90
c	Inner diameter (mm)		
	83,70	83,70	83,70
d	Diameter setting (mm)		
	76 40x60 60 48	76 40x60 60 48	76 40x60 60 48
e	Depth setting (mm) (± 25 mm)		
	970 1020 1055 1090	780 830 855 900	520 570 600 640
f	Thread		
	4 x M12	4 x M12	4 x M12

