

Technical Data sheet V 114x5

Basic Info

KSF V 114x5x 2000-PT	KSF V 114x5x 1500 -ET	KSF V 114x5x 1500-EH	KSF V 114x5x 860-E	KSF V 114x5x M24
Nominal length (mm)				
2000	1500	1500	860	300
Tube diameter (mm)				
114	114	114	114	114
Weight (kg)				
30	22	24	11	7
Steel grade (tube)				
S 235	S 235	S 235	S 235	S 235
Item number				
25611	25613	25612	25614	25674

Construction

- Flange: Sheet metal S 355
- Continuous welded helix
- Average cink layer thickness 100 µm according to DIN EN ISO 1461
- Extra hard Hardox drive point
- Extra thick 5-mm-helix

Accessories



Connection Screw Set 4 pcs.
1,14 kg
Item No. 25605



KSF V
114x5xM24



KSF V
114x5x2000-PT



KSF V
114x5x1500-ET



KSF V
114x5x1500-EH








KSF V
114x5x860-E



Technical Data

	KSF V 114x5x 2000-PT	KSF V 114x5x 1500-ET	KSF V 114x5x 1500-EH	KSF V 114x5x 860-E	KSF V 114x5x M24
a	Length (mm)				
	2000	1500	1500	860	300
b	Outer diameter (mm)				
	114	114	114	114	114
c	Inner diameter (mm)				
	104	104	104	104	104
d	Pitch circle diameter (mm)				
	–	–	–	–	150
e	Central thread				
	–	–	–	–	M24
f	Pitch circle holes (mm)				
	–	–	–	–	6 x Ø 14
g	Flange wrench size (mm)				
	–	–	–	–	166
h	Flange outer diameter (mm)				
	–	–	–	–	182
i	Flange thickness (mm)				
	–	–	–	–	15
j	Octagon connection height (mm)				
	180	180	180	180	180
k	Thread length (mm)				
	450	250	–	–	–
l	Thread pitch (mm)				
	50	50	50	–	–

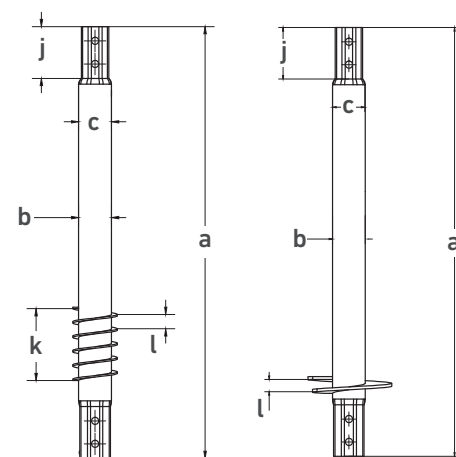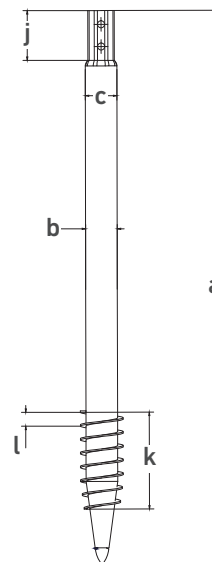

Subject to technical change! Schematic representation!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io

V2_042023